



Inlet and Outlet 3/8" BSPP




LED display and working hours



Control panel



Magnets for easy side access

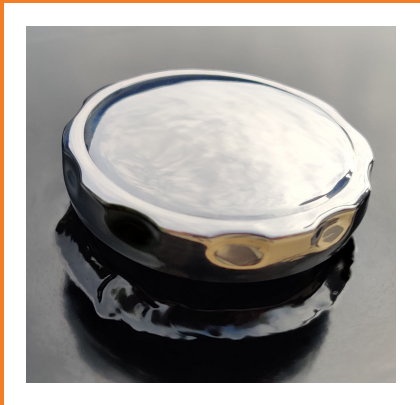

Stainless steel fuel cap



Model	HOT BOX 230VAC - 250
Technical Spec. W.P. bar / psi Flow l/min / gpm Heat energy kcal/h / kW Fuel	 250 / 3626 45 / 11,9 90000 / 105 Diesel
Electrical Spec. Voltage V Amperage A	 230 (50Hz) 1,1
Heat transfer Temp. Increase at 10 l/min °C / °F Temp. Increase at 20 l/min °C / °F Temp. Increase at 30 l/min °C / °F Temp. Increase at 40 l/min °C / °F Temp. Increase at 45 l/min °C / °F	 90 / 194 75 / 167 50 / 122 37 / 98,6 33 / 91,4
Dimensions L x W x H [mm] Weight Kg / lbs	 825 x 605 x 870 112 / 247

All models are CE marked

Standard accessories incl. with each machine:

- Display showing working hours.
- LED display to show faults and power state.
- Emergency stop button.
- 3/8" BSPP Inlet and Outlet. (1/2" BSPP on request)
- Magnetically mounted stainless steel side plates, for easy access.
- 4,5m cable for power supply.
- 30L robust diesel tank with stainless steel fuel cap.
- Fuel level switch.



Lifting hot box



Rotating nozzle



Safety helmet complete

CE & CEW Product Range



CE 08/10 Series



CE 15 Series




CEW 08/10 Series



CEW 15 Series



CE 20 Series

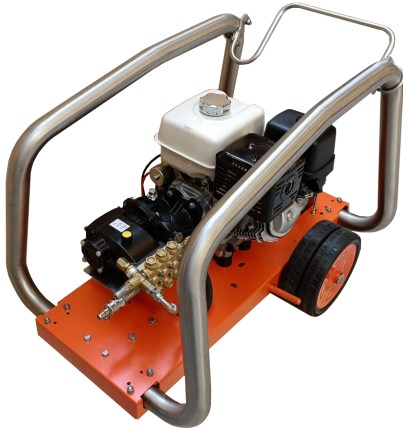

CP 13 Series

Contact: