



Inlet and Outlet 3/8" BSPP




LED display and working hours



Control panel



Magnets for easy side access

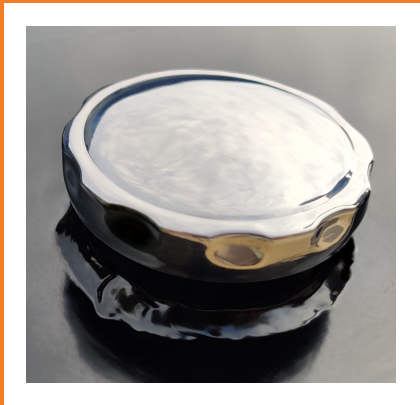

Stainless steel fuel cap



Model	HOT BOX 230VAC - 500	HOT BOX 12VDC - 500
Technical Spec.		
W.P. bar / psi	500 / 7250	500 / 7250
Flow l/min / gpm	45 / 11,9	45 / 11,9
Heat energy kcal/h / kW	90000 / 105	90000 / 105
Fuel	Diesel	Diesel
Electrical Spec.		
Voltage V	230 (50Hz)	12
Amperage A	2,36	36
Heat transfer		
Temp. Increase at 10 l/min °C / °F	90 / 194	90 / 194
Temp. Increase at 20 l/min °C / °F	75 / 167	75 / 167
Temp. Increase at 30 l/min °C / °F	50 / 122	50 / 122
Temp. Increase at 40 l/min °C / °F	37 / 98,6	37 / 98,6
Temp. Increase at 45 l/min °C / °F	33 / 91,4	33 / 91,4
Dimensions		
L x W x H [mm]	825 x 605 x 870	825 x 605 x 870
Weight Kg / lbs	116 / 256	122 / 269

All models are CE marked

Standard accessories incl. with each machine:

- Display showing working hours.
- LED display to show faults and power state.
- Emergency stop button.
- 3/8" BSPP Inlet and Outlet. (1/2" BSPP on request)
- Magnetically mounted stainless steel side plates, for easy access.
- 4,5m cable for power supply.
- 30L robust diesel tank with stainless steel fuel cap.
- Fuel level switch.



Lifting hot box



Rotating nozzle



Safety helmet complete



HOT BOX with CE20-500 and dry shut gun 500bar



CE 20 Series



CE 40 Series

Contact: